

# Fax Inquiry

+49(0)621.78990-130

Company: \_\_\_\_\_


Date: \_\_\_\_\_

Contact Person: \_\_\_\_\_

Tel: \_\_\_\_\_

Fax: \_\_\_\_\_

## Information required for the desired components

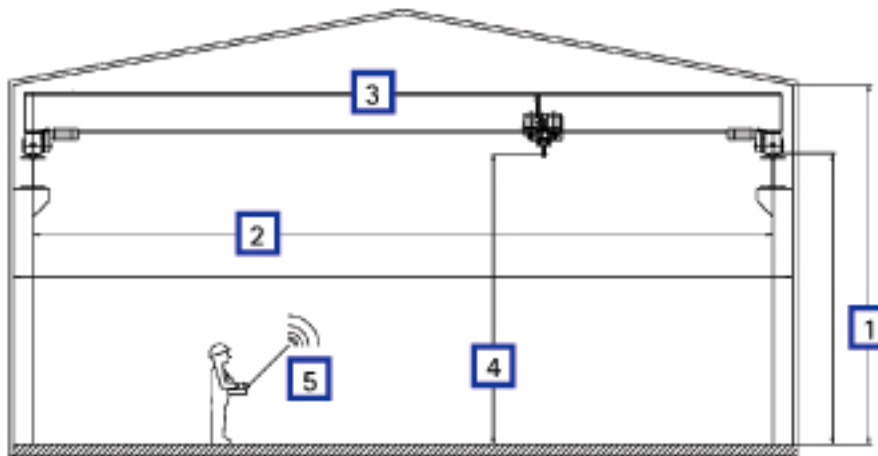

## Building dimensions

- 1** Building height: \_\_\_\_\_ mm
- 2** Building (width) span: \_\_\_\_\_ mm
- 3** Beam width: \_\_\_\_\_ mm
- 4** Lifting height: \_\_\_\_\_ mm
- 5** Remote control: yes ( ) no ( )

## Type Safe working load

- ( ) Single girder crane \_\_\_\_\_ kgs
- ( ) Double girder crane \_\_\_\_\_ kgs
- ( ) Underhung crane \_\_\_\_\_ kgs
- ( ) Monorail \_\_\_\_\_ kgs

Hoist Electric chain hoist ( ) Electric rope hoist ( )

Utilisation indoors ( ) outdoors ( )

Ambient temperature -20°C to 40°C ( ) \_\_\_\_\_ to \_\_\_\_\_ °C ( )

Duty group Fem 1Bm (M3) ( ) Fem 1Am (M4) ( ) Fem 2m (M5) ( ) Fem 3m (M6) ( )

Power supply 400 V / 50 Hz ( ) \_\_\_\_\_ V / \_\_\_\_\_ HZ ( )

Control voltage 48 V ( ) 230 V ( )

## Additional information for EX equipment

Zone Zone 1 ( ) Zone 2 ( )

Explosion protection EEx de IIB T4 ( ) EEx de IIC T4 ( )

Sparkproofing features yes ( ) no ( )